


NOR813

NORSOUND

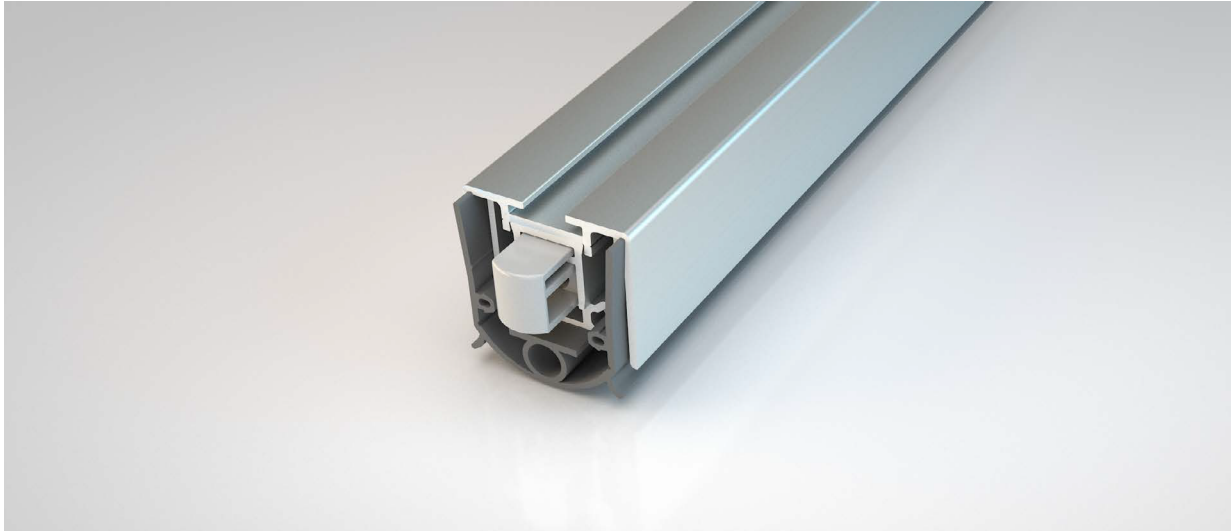

Application

Bottom edge of external timber, metal and composite doorsets

Fixing

Rebated, held in place with angle brackets

Performance

Resistance to driving rain (classification 7A) in accordance with EN 12208
Resistance to wind load (classification C2/Bs) in accordance with EN 12210
Barrier free, no threshold required
Resistance to air permeability (Classification 4) in accordance with EN 12207
Sound reduction up to 54dB

Material

Aluminium, Silicone gasket

Standard lengths (mm)

750, 900, 1050, 1200

Minimum / Maximum length (mm)

230 / 2000

Gap coverage (mm)

16

Actuation

Single

Cutback (mm)

150

Colour

Mill finish, Grey gasket

Order codes

NOR813- + Length eg. **NOR813750** (750mm)

Dimensions

